RPC-59501-7

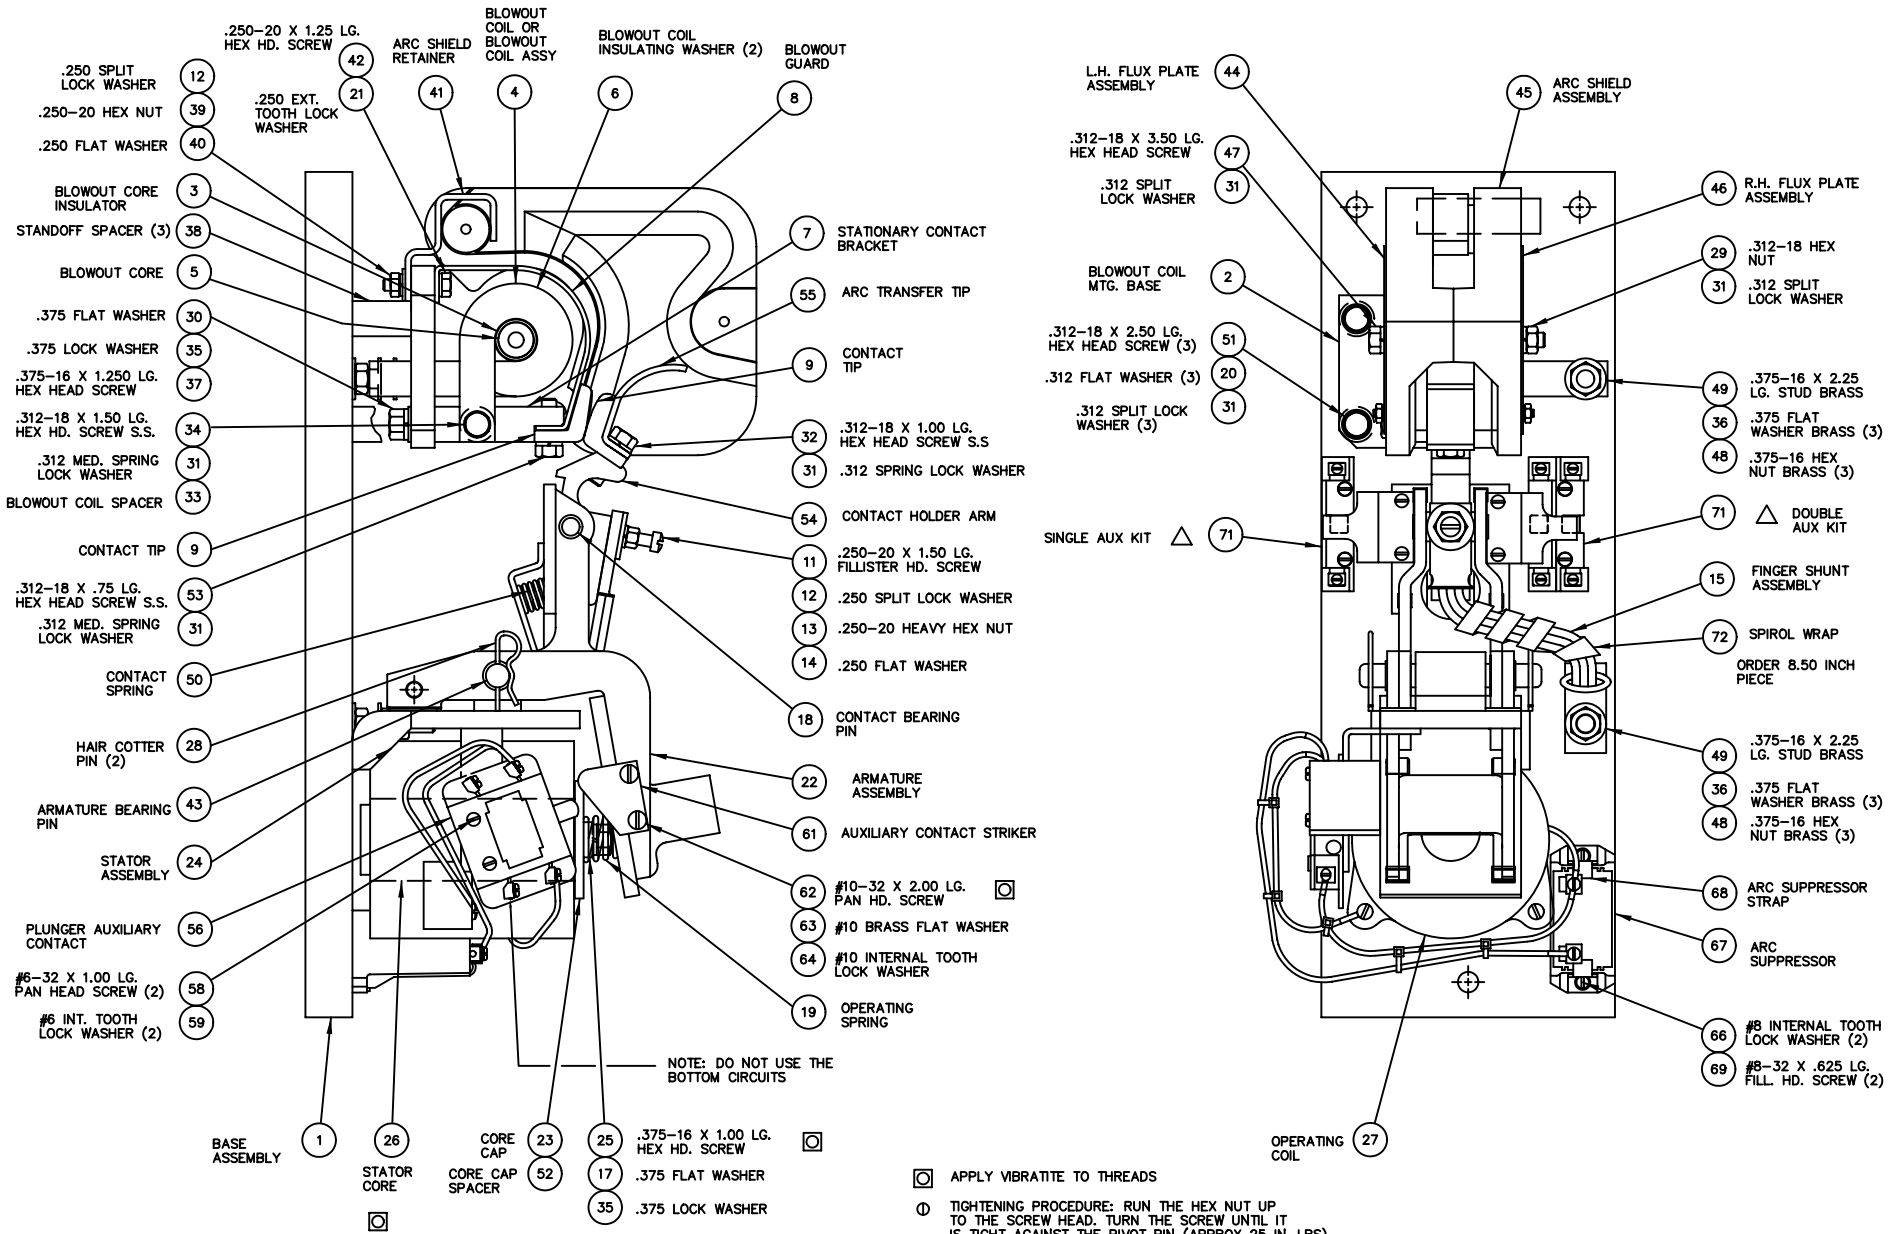

◻ APPLY VIBRATITE TO THREADS

Ⓓ TIGHTENING PROCEDURE: RUN THE HEX NUT UP TO THE SCREW HEAD. TURN THE SCREW UNTIL IT IS TIGHT AGAINST THE PIVOT PIN (APPROX 25 IN-LBS). TIGHTEN NUT DOWN AGAINST THE LOCK WASHER, FLAT WASHER, AND SHUNT.

ALL DIMENSIONS IN INCHES

1:2

Rev	DATE	BY	DESCRIPTION
E			
D			
C			
B			
A	1-25-01	TLJ	REMOVED ITEM 16 (NOW ITEM 31)

LINEAR: 0.X =±.050; 0.XX =±.020; 0.XXX =±.005
HOLE: PUNCH ±.002; DRILL ≤ .50 ±.002, > .50 ±.005; REAM SPECIFIED
ANGLES: DIMEN. ± 1°; UNDIM. 90° ±2°

CADD NO. 59501701
R.M.S.
DATE 09/14/99 | DR.T. JOHNSON | CK. | REF.

Hubbell Industrial Controls, Inc. 50 Edwards Street Madison, Oh. 44057

RENEWAL PARTS BULLETIN 5210
FIBERGLASS BASE
400 AMPERE NORMALLY CLOSED
DC CONTACTOR SIZE #5A DB

DRG. NO. RPC-59501-7
1 OF 2