COMPLETE MOLDED BASE ASSEMBLY
ITEM 72 PART NO. 59576-601

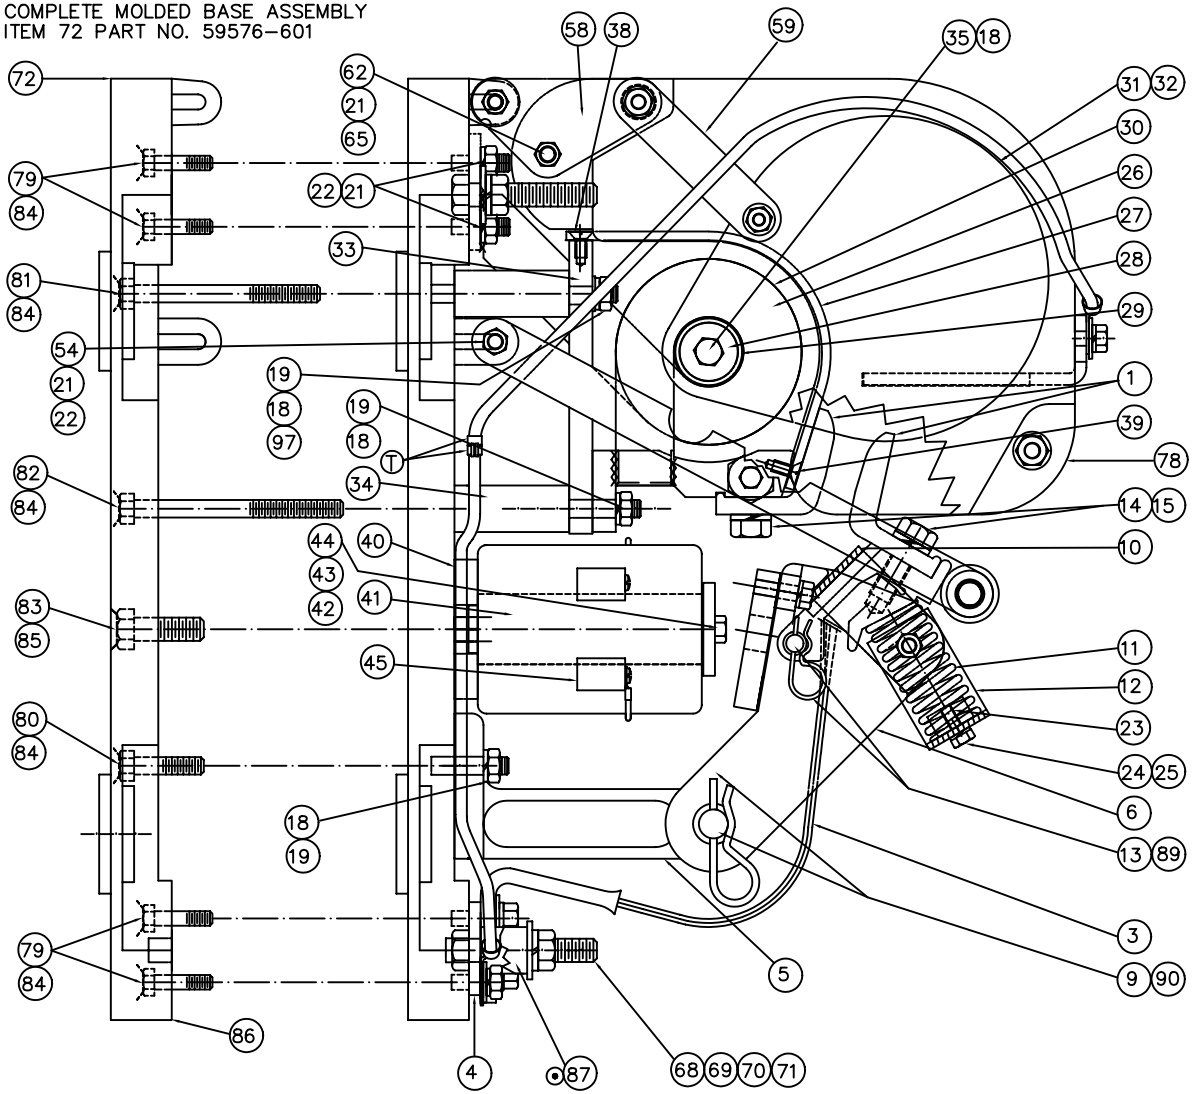

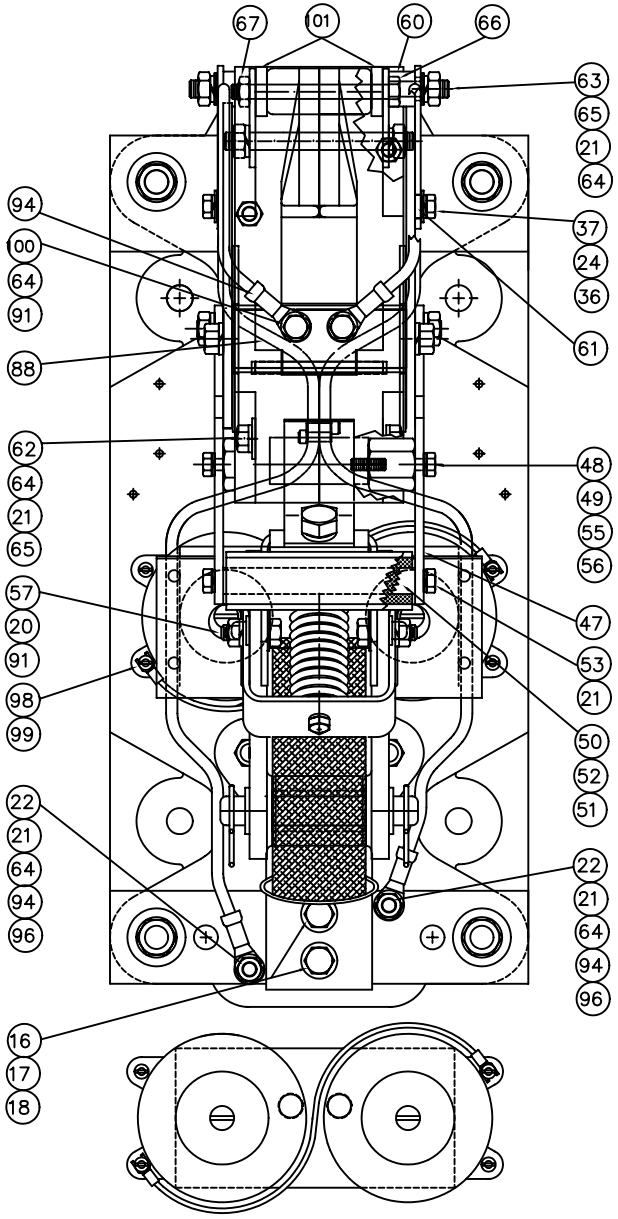

1:2

⊙ USE SPACER ITEM 87
ONLY WHEN CRIMP LUGS
ARE USED IN PLACE OF CLAMP KIT.

NOTES:
ITEM 38 & 39 USE THREAD LOCK AND PRICK PUNCH SCREWS.
(T) USE (2) NYLON CABLE TIES .18" WIDE (AS SHOWN).

Rev	DATE	BY	DESCRIPTION
E			
D			
C	9-22-00	TLJ	ADDED ITEM 97
B	2-21-00	TLJ	UPDATED DRAWING
A	6-27-96	WSM	ARC TRANSFER WIRES CHANGED

LINEAR	HOLE	ANGLES
0.X =±.050	PUNCH ±.002	DIMEN. ± 1°
0.XX =±.020	DRILL ≤ .50 ±.002	
0.XXX =±.005	DRILL > .50 ±.003	UNDIM. 90° ±2°
	REAM SPECIFIED	

CADD NO. 59600300
R.M.S.

Hubbell Industrial Controls, Inc.
50 Edwards Street Madison, Oh. 44057

REPAIR PARTS BULLETIN 5210
MOLDED BASE FRONT REMOVABLE
600 AMP, 1 POLE, N.O.
DC CONTACTOR, SIZE 6

DATE 6-13-96 | DR. WSM | CK. | REF.

DRG. NO. RPC-59600-3
1 OF 2